



TIE DOWN


TIE DOWN & LASHING EQUIPMENT

NYLON RATCHET ASSEMBLY

TYPE: RA1-602, 5000 lb. capacity.

STD. ASSEMBLY: 18" fixed end with flathooks

HOW TO ORDER: Indicate overall length and end attachments.

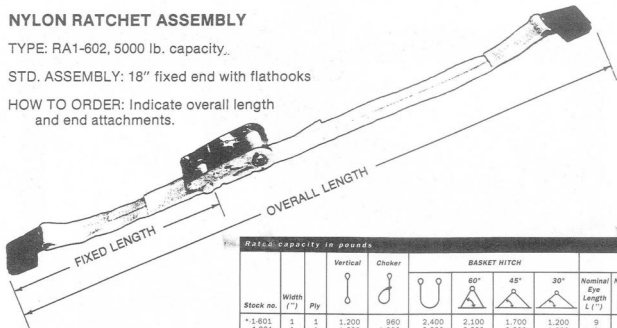

Rated capacity in pounds										
Stock no.	Width (")	Ply	Vertical	Choker	BASKET HITCH			Nominal Eye Length L (")	Nominal Eye Width W (")	
					60°	45°	30°			
*-1601	1	1	1,200	960	2,400	2,100	1,700	1,200	9	1
-1901	1	1	1,600	1,300	3,200	2,800	2,300	1,600	9	1
-2401	1	2	2,400	1,920	4,800	4,200	3,400	2,400	9	1
-2901	1	2	3,200	2,600	6,400	5,500	4,500	3,200	9	1
-3601	1	3	3,600	2,900	7,200	6,200	5,100	3,600	12	1
-3901	1	3	4,100	3,300	8,200	7,100	5,800	4,100	12	1
-4601	1	4	4,800	3,800	9,600	8,300	6,800	4,800	12	1
-4901	1	4	5,500	4,400	11,000	9,500	7,800	5,500	12	1
-1602	2	1	2,400	1,900	4,800	4,200	3,400	2,400	9	2
-1902	2	1	3,200	2,600	6,400	5,500	4,500	3,200	9	2
-2602	2	2	4,800	3,800	9,600	8,300	6,800	4,800	9	2
-2902	2	2	6,400	5,100	12,800	11,100	9,000	6,400	9	2
-3602	2	3	6,700	5,300	13,300	11,500	9,400	6,700	12	2
-3902	2	3	8,200	6,600	16,500	14,300	11,600	8,200	12	2
-4602	2	4	8,900	7,100	17,800	15,500	12,500	8,900	12	2
-4902	2	4	11,000	8,800	22,000	19,000	15,500	11,000	12	2
-1603	3	1	3,600	2,900	7,200	6,200	5,100	3,600	12	1 1/2
-1903	3	1	4,800	3,800	9,600	8,300	6,800	4,800	12	1 1/2
-2403	3	2	6,700	5,300	13,300	11,500	9,400	6,700	12	1 1/2
-2903	3	2	8,900	7,100	17,800	15,400	12,600	8,900	12	1 1/2
-3603	3	3	10,000	8,000	20,000	17,300	14,100	10,000	15	1 1/2
-3903	3	3	12,300	9,900	24,700	21,400	17,500	12,300	15	1 1/2
-4603	3	4	13,300	10,700	26,600	23,100	18,800	13,300	15	1 1/2
-4903	3	4	16,500	13,200	32,900	28,500	23,300	16,500	15	1 1/2
-1604	4	1	4,800	3,800	9,600	8,300	6,800	4,800	12	2
-1904	4	1	6,400	5,100	12,800	11,100	9,000	6,400	12	2
-2404	4	2	8,600	6,900	17,300	15,000	12,300	8,600	12	2
-2904	4	2	11,500	9,200	23,000	20,000	16,300	11,500	12	2
-3604	4	3	13,000	10,400	25,900	22,800	18,300	13,000	15	2
-3904	4	3	15,300	12,200	30,600	26,500	21,600	15,300	15	2
-4604	4	4	17,300	13,800	34,600	30,500	24,400	17,300	15	2
-4904	4	4	20,400	16,300	40,800	35,300	28,800	20,400	15	2
-1606	6	1	7,200	5,800	14,400	12,500	10,200	7,200	12	2
-1906	6	1	9,600	7,700	19,200	16,800	13,600	9,600	12	2
-2406	6	2	12,200	9,800	24,500	21,200	17,300	12,200	15	2
-2906	6	2	16,300	13,100	32,600	28,300	23,100	16,300	15	2
-3606	6	3	18,400	14,700	36,700	31,800	25,900	18,400	18	3
-3906	6	3	22,900	18,300	45,900	39,700	32,400	22,900	18	3
-4606	6	4	24,500	19,600	49,000	42,400	34,600	24,500	18	3
-4906	6	4	30,600	24,500	61,200	53,000	43,200	30,600	18	3
-1908	8	1	12,800	10,200	25,600	22,200	18,100	12,800	18	3
-2908	8	2	20,500	16,400	41,000	35,500	29,000	20,500	18	3
-3908	8	3	30,700	24,600	61,400	53,200	43,000	30,700	24	4
-4908	8	4	41,000	32,800	81,900	70,900	57,900	41,000	24	4
-1910	10	1	16,000	12,800	32,000	27,700	22,600	16,000	18	3 1/2
-2910	10	2	24,000	19,200	48,000	41,600	33,900	24,000	18	3 1/2
-3910	10	3	36,000	28,800	72,000	62,300	50,900	36,000	24	5
-4910	10	4	48,000	38,400	96,000	83,100	67,900	48,000	24	5
-1912	12	1	19,200	15,400	38,400	33,200	27,100	19,200	24	4
-2912	12	2	26,900	21,500	53,700	46,500	38,000	26,900	24	4
-3912	12	3	40,300	32,200	80,600	69,500	57,000	40,300	24	6
-4912	12	4	53,700	43,000	107,400	93,000	76,000	53,700	24	6

* Insert *EEF* prefix to indicate Type 3 and *EE* prefix to indicate Type 4.

See page 16 to see Types 3 and 4 light-duty slings.

Warning: Horizontal sling angles less than 30° shall not be used.